



GOLD STANDARD – INDUSTRIAL GRINDERS



**MICHIGAN
PNEUMATIC TOOL**

Gold Standard - Industrial Grinders

New Options Now Available:

- 40 New Models
- Wheel Grinders: 3" and 4" Type 1 as well as 4" Type 27
- Extended Angle Grinders and Belt Sanders: 4" and 6" Extensions
- Disc Sanders: 2" / 3" Sanders
- Front Exhaust



Same quality you've come to expect:

- Compact suite of parts builds an expansive family of tools
- Hardened alloy steel cylinders enhancing power and longevity
- Housings milled from solid aluminum bar stock for precision and longevity. The machined ribs allow for grip and comfort
- Integrated regulator allows for operator adjustment without altering the air supply
- Precision machined, spiral bevel gears provide smooth operation and extended life
- All steel angle heads and thread guards stand up to demanding environments

NOW Offering 6 Different Motor Configurations



0.9 hp

0.9 hp in both front and rear exhaust. Designed for heavy-duty use in foundry, shipyard, welding and other industrial applications. The most powerful option offered in the Gold Series.



0.6 hp

0.6 hp in both front and rear exhaust. Designed for metal fabrication, boiler maintenance and more. When the application calls for more power or a different speed, stepping up to a more powerful motor can get the job done faster.



0.3 hp

0.3 hp in both front and rear exhaust. Ideal for aircraft, metal finishing and tool & die. The small body allows for clearance in tight and hard to reach places.



★ New Models



G25300



G18901F

Straight

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
	G25300	Straight	Rear	1/4" Collet	25,000 rpm	0.3	5-5/8"	.82 lbs	1/4"	1/4"	10 cfm
★	G25301F	Straight	Front	1/4" Collet	25,000 rpm	0.3	4-5/8"	.75 lbs	1/4"	1/4"	10 cfm
	G22601F	Straight	Front	1/4" Collet	22,000 rpm	0.6	5-3/4"	1.28 lbs	1/4"	3/8"	21 cfm
★	G20600R	Straight	Rear	1/4" Collet	20,000 rpm	0.6	7"	1.47 lbs	1/4"	3/8"	21 cfm
★	G18901F	Straight	Front	1/4" Collet	18,000 rpm	0.9	6-1/4"	1.43 lbs	1/4"	3/8"	27 cfm
	G18900R	Straight	Rear	1/4" Collet	18,000 rpm	0.9	7-1/4"	1.63 lbs	1/4"	3/8"	27 cfm



G25306B



G25308B

Extended Straight

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Extension Length	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
	G25304B	Ext. Straight	Rear	1/4" Collet	25,000 rpm	0.3	3.5"	9-1/8"	1.30 lbs	1/4"	1/4"	10 cfm
	G25306B	Ext. Straight	Rear	1/4" Collet	25,000 rpm	0.3	5.5"	11-1/8"	1.50 lbs	1/4"	1/4"	10 cfm
	G25308B	Ext. Straight	Rear	1/4" Collet	25,000 rpm	0.3	7.5"	13-1/8"	1.70 lbs	1/4"	1/4"	10 cfm

Call Today to Order • 800-521-8104

★ New Models



Angle Collet

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
	G12390	Angle	Rear	1/4" Collet	12,000 rpm	0.3	5-3/4"	1.12 lbs	1/4"	1/4"	8 cfm
★	G12391F	Angle	Front	1/4" Collet	12,000 rpm	0.3	4-7/8"	1.05 lbs	1/4"	1/4"	8 cfm
	G20390	Angle	Rear	1/4" Collet	20,000 rpm	0.3	5-3/4"	1.12 lbs	1/4"	1/4"	8 cfm
★	G20391F	Angle	Front	1/4" Collet	20,000 rpm	0.3	4-7/8"	1.05 lbs	1/4"	1/4"	8 cfm
★	G18690R-C4	Angle	Rear	1/4" Collet	18,000 rpm	0.6	8"	1.80 lbs	1/4"	3/8"	16 cfm
★	G14990R-C4	Angle	Rear	1/4" Collet	14,500 rpm	0.9	7-3/4"	2.05 lbs	1/4"	3/8"	22 cfm



Extended Angle Collet

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Extension Length	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
★	G12390E4	Ext Angle	Rear	1/4" Collet	12,000 rpm	0.3	3-1/2"	9-1/4"	1.80 lbs	1/4"	1/4"	8 cfm
★	G20390E4	Ext Angle	Rear	1/4" Collet	20,000 rpm	0.3	3-1/2"	9-1/4"	1.80 lbs	1/4"	1/4"	10 cfm
★	G12390E6	Ext Angle	Rear	1/4" Collet	12,000 rpm	0.3	5-1/2"	11-3/8"	2.07 lbs	1/4"	1/4"	8 cfm
★	G20390E6	Ext Angle	Rear	1/4" Collet	20,000 rpm	0.3	5-1/2"	11-3/8"	2.07 lbs	1/4"	1/4"	10 cfm
★	G18690RE4-C4	Ext Angle	Rear	1/4" Collet	18,000 rpm	0.6	3-1/2"	10-3/8"	2.00 lbs	1/4"	3/8"	16 cfm
★	G18690RE6-C4	Ext Angle	Rear	1/4" Collet	18,000 rpm	0.6	5-1/2"	12-3/8"	2.25 lbs	1/4"	3/8"	16 cfm
★	G14990RE4-C4	Ext Angle	Rear	1/4" Collet	14,500 rpm	0.9	3-1/2"	10-5/8"	2.25 lbs	1/4"	3/8"	22 cfm
★	G14990RE6-C4	Ext Angle	Rear	1/4" Collet	14,500 rpm	0.9	5-1/2"	12-5/8"	2.50 lbs	1/4"	3/8"	22 cfm

★ New Models



Angle Wheel

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
★	G18690R-384T7	Angle	Rear	4" Type 27 Wheel	18,000 rpm	0.6	8"	2.80 lbs	1/4"	1/4"	16 cfm
★	G14990R-384T7	Angle	Rear	4" Type 27 Wheel	14,500 rpm	0.9	8 1/4"	2.65 lbs	1/4"	1/4"	22 cfm
★	G18690R-384T1	Angle	Rear	4" Type 1 Wheel	18,000 rpm	0.6	8-1/4"	2.40 lbs	1/4"	3/8"	16 cfm
★	G14990R-384T1	Angle	Rear	4" Type 1 Wheel	14,000 rpm	0.9	8-1/2"	2.60 lbs	1/4"	3/8"	22 cfm



Extended Angle Wheel

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Extension Length	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
★	G12390E4-383T1	Ext Angle	Rear	3" Type 1 Wheel	12,000 rpm	0.3	3-1/2"	9-1/2"	1.80 lbs	1/4"	3/8"	8 cfm
★	G20390E4-383T1	Ext Angle	Rear	3" Type 1 Wheel	20,000 rpm	0.3	3-1/2"	9-1/2"	1.80 lbs	1/4"	3/8"	8 cfm
★	G12390E6-383T1	Ext Angle	Rear	3" Type 1 Wheel	12,000 rpm	0.3	5-1/2"	11-5/8"	2.00 lbs	1/4"	3/8"	8 cfm
★	G20390E6-383T1	Ext Angle	Rear	3" Type 1 Wheel	20,000 rpm	0.3	5-1/2"	11-5/8"	2.00 lbs	1/4"	3/8"	8 cfm
★	G12390E4-384T1	Ext Angle	Rear	4" Type 1 Wheel	12,000 rpm	0.3	3-1/2"	9-1/2"	2.00 lbs	1/4"	1/4"	8 cfm
★	G20390E4-384T1	Ext Angle	Rear	4" Type 1 Wheel	20,000 rpm	0.3	3-1/2"	9-1/2"	2.00 lbs	1/4"	1/4"	8 cfm
★	G12390E6-384T1	Ext Angle	Rear	4" Type 1 Wheel	12,000 rpm	0.3	5-1/2"	11-5/8"	2.20 lbs	1/4"	1/4"	8 cfm
★	G20390E6-384T1	Ext Angle	Rear	4" Type 1 Wheel	20,000rpm	0.3	5-1/2"	11-5/8"	2.20 lbs	1/4"	1/4"	8 cfm
★	G18690RE4-384T1	Ext Angle	Rear	4" Type 1 Wheel	18,000 rpm	0.6	3-1/2"	10-5/8"	2.20 lbs	1/4"	3/8"	16 cfm
★	G18690RE6-384T1	Ext Angle	Rear	4" Type 1 Wheel	18,000 rpm	0.6	5-1/2"	12-3/8"	2.45 lbs	1/4"	3/8"	16 cfm
★	G14990RE4-384T1	Ext Angle	Rear	4" Type 1 Wheel	14,500 rpm	0.9	3-1/2"	10-7/8"	2.45 lbs	1/4"	3/8"	22 cfm
★	G14990RE6-384T1	Ext Angle	Rear	4" Type 1 Wheel	14,500 rpm	0.9	5-1/2"	12-5/8"	2.70 lbs	1/4"	3/8"	22 cfm
★	G18690RE4-384T7	Ext Angle	Rear	4" Type 27 Wheel	18,000 rpm	0.6	3-1/2"	10-5/8"	3.00 lbs	1/4"	3/8"	16 cfm
★	G18690RE6-384T7	Ext Angle	Rear	4" Type 27 Wheel	18,000 rpm	0.6	5-1/2"	12-3/8"	3.30 lbs	1/4"	3/8"	16 cfm
★	G14990RE4-384T7	Ext Angle	Rear	4" Type 27 Wheel	14,500 rpm	0.9	3-1/2"	10-7/8"	3.25 lbs	1/4"	3/8"	22 cfm
★	G14990RE6-384T7	Ext Angle	Rear	4" Type 27 Wheel	14,500 rpm	0.9	5-1/2"	12-3/8"	3.55 lbs	1/4"	3/8"	22 cfm

Call Today to Order • 800-521-8104

★ New Models




Sanders

New	Model	Type	Exhaust	Capacity	Free Speed	Max HP	Extension Length	Overall Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Cons.
★	G20391F-382S	Sander	Front	2" Pad	20,000 rpm	0.3	-	4-7/8"	1.00 lbs	1/4"	1/4"	10 cfm
★	G20390-382S	Sander	Rear	2" Pad	20,000 rpm	0.3	-	5-3/4"	1.12 lbs	1/4"	1/4"	8 cfm
★	G34490E4-3823S	Sander	Rear	2" Pad or 3" Pad	3400 rpm	0.4	4"	10-3/4"	2.25 lbs	1/4"	1/4"	7 cfm
	G12390-BA	Belt	Rear	1/2" x 12" Belt	12,000 rpm	0.3	-	10-3/8"	1.50 lbs	1/4"	1/4"	8 cfm
	G12390-BA-EXT	Belt	Rear	1/2" x 18" Belt	12,000 rpm	0.3	-	13-3/8"	1.65 lbs	1/4"	1/4"	8 cfm
	G20390-BA	Belt	Rear	1/2" x 12" Belt	20,000 rpm	0.3	-	10-3/8"	1.50 lbs	1/4"	1/4"	8 cfm
★	G12390E4-BA	Belt	Rear	1/2" x 12" Belt	12,000 rpm	0.3	3-1/2"	12-1/8"	2.18 lbs	1/4"	1/4"	8 cfm
★	G12390E6-BA	Belt	Rear	1/2" x 12" Belt	12,000 rpm	0.3	5-1/2"	16-1/4"	2.45 lbs	1/4"	1/4"	8 cfm



Wrenches

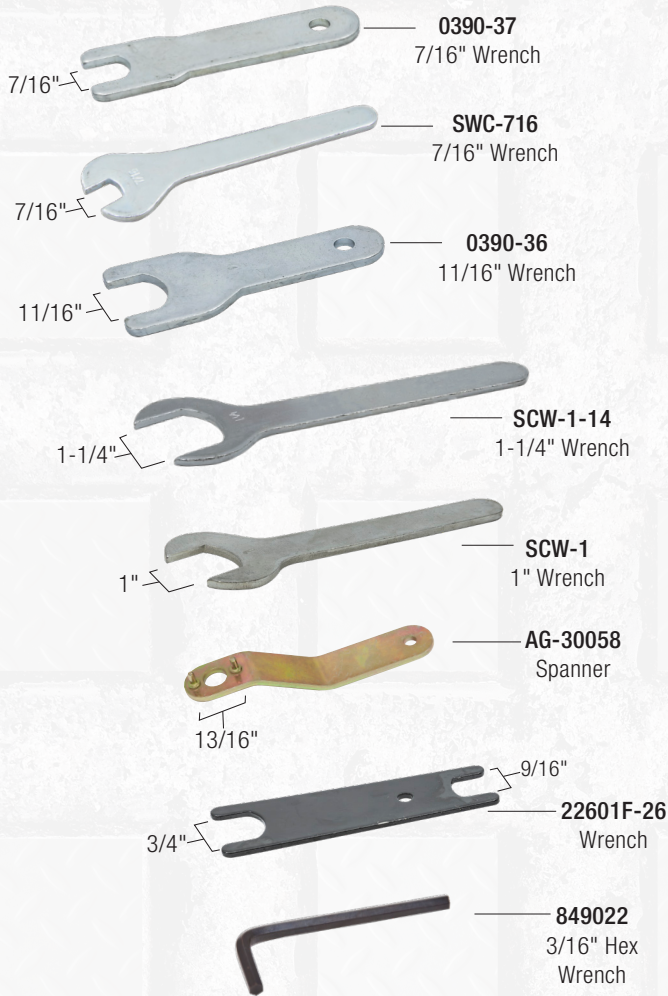

Collets



200 Series Collet Size	Part No.
1/8"	C-1028-0.125
3/16"	C-1028-0.1875
5/16"	C-1028-0.3125
3/8"	C-1028-0.375
6mm	C-1028-6MM

300 Series Collet Size	Part No.
3/64"	C-1027-0.0468
5/64"	C-1027-0.0781
3/32"	C-1027-0.0937
7/64"	C-1027-0.1093
1/8"	C-1027-0.125
9/64"	C-1027-0.1406
5/32"	C-1027-0.1562
3/16"	C-1027-0.1875
13/64"	C-1027-0.2031
8mm	C-1027-8MM

Oil & Grease Gun



OIL-085
32oz Oil



OIL-080
4oz Oil



C098689
Grease Gun

Pads for Sander

3/8"-24 female threads




R202-38-24FEM
2" Spiral Face Pad



R303-38-24FEM
3" Spiral Face Pad



Click on the QR code for a
Parts Print booklet.

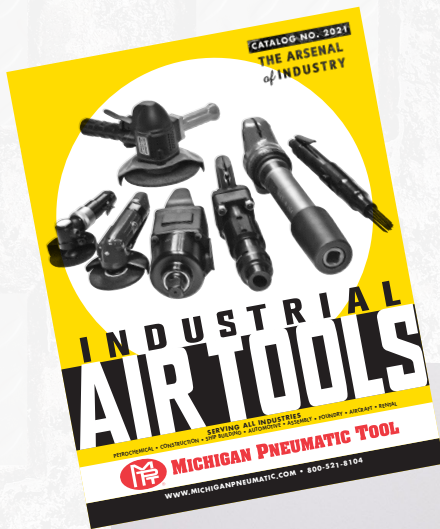

Check out our catalog
and website available on
your computer, laptop,
tablet and phone!



**MICHIGAN
PNEUMATIC TOOL**

6850 Middlebelt Rd. • P.O. Box 906
Romulus, MI 48174-7406

800-521-8104 • www.MichiganPneumatic.com