

Clamps



Michigan Pneumatic

Industrial Quality "C" Clamps Spatter Resistant Deep Throat

The extra deep throat allows maximum clearance for body builders, welders (weld spatter will not stick to the copper plated screw and swivel), wood workers and general machine shop workers. Drop forged and heat treated with a tough Acme thread for long life and durable performance.



Model No.	Capacity	Throat Depth	Length	Width	Screw Diameter
CC402	2"	2"	6"	3-3/4"	1/2"
CC403	3"	2-1/2"	8"	4-1/4"	5/8"
CC404	4"	2-7/8"	10"	5"	3/4"
CC406	6"	3-5/8"	12"	6"	3/4"
CC408	8"	4-1/2"	14-1/2"	7"	3/4"
CC410	10"	5-3/8"	17-1/4"	8-1/2"	3/4"
CC412	12"	5-3/4"	20"	9-3/8"	7/8"

Michigan Pneumatic

Heavy-Duty Forged "C" Clamps Heaviest Clamp Made

Features a heat treated, drop forged frame and tempered steel spindles turned from bar stock. Also includes an unconditional guarantee against breakage, natural finish and bulk packaging. Heat treated screws and square heads provide for use of wrenches.



Model No.	Capacity	Throat Depth	Screw Diameter	Min. Test Load	Weight
CC1H	1-1/4"	1-1/8"	3/8"	5600 lbs.	1 lb.
CC112H	1-1/2"	1-3/8"	1/2"	9000 lbs.	2 lbs.
CC2H	2-1/2"	1-1/2"	5/8"	13500 lbs.	4 lbs.
CC3H	3-1/2"	2-1/4"	3/4"	17000 lbs.	7 lbs.
CC4H	4-1/2"	2-3/4"	7/8"	20000 lbs.	10 lbs.
CC5H	5-1/2"	3-1/8"	1"	23000 lbs.	15 lbs.
CC6H	6-1/2"	3-1/2"	1-1/8"	27000 lbs.	18 lbs.
CC8H	8-1/2"	3-3/4"	1-1/4"	31250 lbs.	25 lbs.
CC10H	10-1/2"	4-1/8"	1-1/4"	35000 lbs.	30 lbs.
CC12H	12-1/2"	4-1/2"	1-1/2"	40000 lbs.	35 lbs.

Michigan Pneumatic Forged Steel Machine Strap Clamps



U-Series Strap Clamps

Model No.	Length	Width	Thickness	Slot Width	Slot Length	Offset	Approx. Weight
UC-64	4"	1-3/4"	3/4"	11/16"	3-1/2"	-	1 lb.
UC-66	6"	2"	7/8"	11/16"	5-1/2"	-	2 lbs.
UC-68	8"	2-3/8"	1-1/8"	13/16"	7-3/8"	-	4 lbs.
UC-110	10"	2-3/4"	1-1/4"	15/16"	9"	-	6.5 lbs.
UC-112	12"	3-1/4"	1-3/8"	1-1/16"	11"	-	11 lbs.



Finger-Series Strap Clamps

Model No.	Length	Width	Thickness	Slot Width	Slot Length	Offset	Approx. Weight
FC-44	4"	1-3/8"	3/4"	11/16"	1-3/8"	-	.75 lb.
FC-46	6"	1-3/4"	7/8"	11/16"	1-15/16"	-	1.5 lbs.
FC-48	8"	2-1/8"	1-1/8"	13/16"	2-9/16"	-	3 lbs.



Plain-Series Strap Clamps

Model No.	Length	Width	Thickness	Slot Width	Slot Length	Offset	Approx. Weight
PC-54	4"	1-5/8"	3/4"	11/16"	1-3/8"	-	1 lb.
PC-56	6"	1-3/4"	7/8"	11/16"	2-1/16"	-	1.75 lbs.
PC-58	8"	2-1/8"	1-1/8"	13/16"	2-13/16"	-	3.75 lbs.
PC-59	10"	2-1/2"	1-3/8"	15/16"	3-11/16"	-	7 lbs.



Gooseneck-Series Strap Clamps


Model No.	Length	Width	Thickness	Slot Width	Slot Length	Offset	Approx. Weight
GC-74	4"	1-3/8"	3/4"	11/16"	15/16"	13/16"	1 lb.
GC-76	6"	1-3/4"	7/8"	11/16"	1-11/16"	15/16"	2 lbs.
GC-78	8"	2-1/8"	1-1/8"	13/16"	2-7/16"	1-1/8"	4.25 lbs.

Miscellaneous Tools



Wilton® Heavy-Duty Vises

Rugged, dependable, economically priced general purpose vises. Features locking swivel base, replaceable jaws, fabricated steel construction, built-in anvil with horn and pipe jaws.

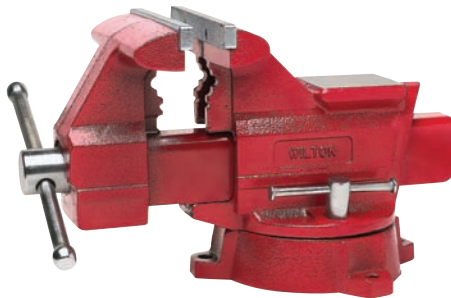

600648HD

Model No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw	Weight
600674	4-1/2"	4"	2-5/8"	1/8" to 2"	19.40 lbs.
600675	5-1/2"	5"	3-5/16"	1/8" to 2-1/2"	29.20 lbs.
600676	6-1/2"	5-1/2"	3-13/16"	1/8" to 2-1/2"	41.85 lbs.
600656HD	6"	6"	3-1/2"	1/8" to 3"	64.10 lbs.
600648HD	8"	7-1/2"	4-1/2"	1/8" to 3"	86.20 lbs.

Michigan Pneumatic Model MP-290-ST Air Caulking Gun

Produces a constant flow for an even bead. Ideal for construction and automotive applications.



Max. Air Pressure	70 psi
Air Inlet Thread	1/4"
Tube Size	2" dia. x 8-1/2" lg.

JET Toe & Screw Jacks

Screw Jacks

Model No.	Rated Capacity	Screw Size	Base Size	Closed Height	Extended Height
SJ-5T	5 ton	1" x 6"	4-1/2"	9"	13"
SJ-10T	10 ton	1-1/2" x 8-3/8"	5-1/4"	11"	17-1/2"
SJ-15T	15 ton	1-5/8" x 10-1/2"	6"	13-3/4"	21"
SJ-20T	20 ton	2" x 12"	6-7/8"	16"	25"
SJ-25T	25 ton	2-1/2" x 12"	8"	16-1/2"	25-1/4"

Turning Bars

Model No.	Size	Fits Jack
440301	1/2" x 18"	SJ-5T
440302	5/8" x 24"	SJ-10T
440303	3/4" x 36"	SJ-15T to SJ-25T
440304	3/4" x 42"	SJ-15T to SJ-25T



440304



SJ-5T

Michigan Pneumatic Model APGG1 Air Operated Grease Gun

One handed grease gun delivers 1500 to 9000 psi each time the trigger is pressed. Loads three ways and has E-Z air vent cap. Equipped with 1/4" NPT fitting.



Michigan Pneumatic Model MC-114

High Frequency Vibrator

For Molding/Core Machines and Foundries

Heavy-duty vibrator cast from ductile iron and precision machined to provide a long service life under the most adverse foundry conditions. Ideal for all production and automotive foundries. **Other models available.**



Length	5-3/4"
Height	3-1/4"
Width	2-3/8"
Mounting Bolt Centers	3-3/4" or 4"
Weight	7 lbs.
Vibrations/Min. @ 70 psi	9100
Air Inlet Thread	1/4"

Chicago Pneumatic Model CP-718

Car Shaker/Vibrator

Quickly locates all interior and exterior squeaks and rattles. Includes 28 ft. air supply and extension hose, frequency control regulator and 8 ft. exhaust hose with muffler.



Recommended Air Pressure	100-145 psi
Vibrations Per Minute	300-1400
Cylinder Weight	15 lbs.
Hose Size	3/8"
Average Air Consumption	3 cfm