

Clamps



Michigan Pneumatic

Industrial Quality "C" Clamps Spatter Resistant Deep Throat

The extra deep throat allows maximum clearance for body builders, welders (weld spatter will not stick to the copper plated screw and swivel), wood workers and general machine shop workers. Drop forged and heat treated with a tough Acme thread for long life and durable performance.



| Model No. | Capacity | Throat Depth | Length | Width | Screw Diameter |
|-----------|----------|--------------|---------|--------|----------------|
| CC402 | 2" | 2" | 6" | 3-3/4" | 1/2" |
| CC403 | 3" | 2-1/2" | 8" | 4-1/4" | 5/8" |
| CC404 | 4" | 2-7/8" | 10" | 5" | 3/4" |
| CC406 | 6" | 3-5/8" | 12" | 6" | 3/4" |
| CC408 | 8" | 4-1/2" | 14-1/2" | 7" | 3/4" |
| CC410 | 10" | 5-3/8" | 17-1/4" | 8-1/2" | 3/4" |
| CC412 | 12" | 5-3/4" | 20" | 9-3/8" | 7/8" |

Michigan Pneumatic

Heavy-Duty Forged "C" Clamps Heaviest Clamp Made

Features a heat treated, drop forged frame and tempered steel spindles turned from bar stock. Also includes an unconditional guarantee against breakage, natural finish and bulk packaging. Heat treated screws and square heads provide for use of wrenches.



| Model No. | Capacity | Throat Depth | Screw Diameter | Min. Test Load | Weight |
|-----------|----------|--------------|----------------|----------------|---------|
| CC1H | 1-1/4" | 1-1/8" | 3/8" | 5600 lbs. | 1 lb. |
| CC112H | 1-1/2" | 1-3/8" | 1/2" | 9000 lbs. | 2 lbs. |
| CC2H | 2-1/2" | 1-1/2" | 5/8" | 13500 lbs. | 4 lbs. |
| CC3H | 3-1/2" | 2-1/4" | 3/4" | 17000 lbs. | 7 lbs. |
| CC4H | 4-1/2" | 2-3/4" | 7/8" | 20000 lbs. | 10 lbs. |
| CC5H | 5-1/2" | 3-1/8" | 1" | 23000 lbs. | 15 lbs. |
| CC6H | 6-1/2" | 3-1/2" | 1-1/8" | 27000 lbs. | 18 lbs. |
| CC8H | 8-1/2" | 3-3/4" | 1-1/4" | 31250 lbs. | 25 lbs. |
| CC10H | 10-1/2" | 4-1/8" | 1-1/4" | 35000 lbs. | 30 lbs. |
| CC12H | 12-1/2" | 4-1/2" | 1-1/2" | 40000 lbs. | 35 lbs. |

Michigan Pneumatic Forged Steel Machine Strap Clamps



U-Series Strap Clamps

| Model No. | Length | Width | Thickness | Slot Width | Slot Length | Offset | Approx. Weight |
|-----------|--------|--------|-----------|------------|-------------|--------|----------------|
| UC-64 | 4" | 1-3/4" | 3/4" | 11/16" | 3-1/2" | - | 1 lb. |
| UC-66 | 6" | 2" | 7/8" | 11/16" | 5-1/2" | - | 2 lbs. |
| UC-68 | 8" | 2-3/8" | 1-1/8" | 13/16" | 7-3/8" | - | 4 lbs. |
| UC-110 | 10" | 2-3/4" | 1-1/4" | 15/16" | 9" | - | 6.5 lbs. |
| UC-112 | 12" | 3-1/4" | 1-3/8" | 1-1/16" | 11" | - | 11 lbs. |



Finger-Series Strap Clamps

| Model No. | Length | Width | Thickness | Slot Width | Slot Length | Offset | Approx. Weight |
|-----------|--------|--------|-----------|------------|-------------|--------|----------------|
| FC-44 | 4" | 1-3/8" | 3/4" | 11/16" | 1-3/8" | - | .75 lb. |
| FC-46 | 6" | 1-3/4" | 7/8" | 11/16" | 1-15/16" | - | 1.5 lbs. |
| FC-48 | 8" | 2-1/8" | 1-1/8" | 13/16" | 2-9/16" | - | 3 lbs. |



Plain-Series Strap Clamps

| Model No. | Length | Width | Thickness | Slot Width | Slot Length | Offset | Approx. Weight |
|-----------|--------|--------|-----------|------------|-------------|--------|----------------|
| PC-54 | 4" | 1-5/8" | 3/4" | 11/16" | 1-3/8" | - | 1 lb. |
| PC-56 | 6" | 1-3/4" | 7/8" | 11/16" | 2-1/16" | - | 1.75 lbs. |
| PC-58 | 8" | 2-1/8" | 1-1/8" | 13/16" | 2-13/16" | - | 3.75 lbs. |
| PC-59 | 10" | 2-1/2" | 1-3/8" | 15/16" | 3-11/16" | - | 7 lbs. |



Gooseneck-Series Strap Clamps


| Model No. | Length | Width | Thickness | Slot Width | Slot Length | Offset | Approx. Weight |
|-----------|--------|--------|-----------|------------|-------------|--------|----------------|
| GC-74 | 4" | 1-3/8" | 3/4" | 11/16" | 15/16" | 13/16" | 1 lb. |
| GC-76 | 6" | 1-3/4" | 7/8" | 11/16" | 1-11/16" | 15/16" | 2 lbs. |
| GC-78 | 8" | 2-1/8" | 1-1/8" | 13/16" | 2-7/16" | 1-1/8" | 4.25 lbs. |

Miscellaneous Tools



Wilton® Heavy-Duty Vises

Rugged, dependable, economically priced general purpose vises. Features locking swivel base, replaceable jaws, fabricated steel construction, built-in anvil with horn and pipe jaws.

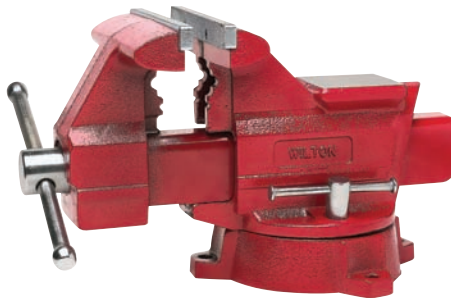

600648HD

| Model No. | Jaw Width | Jaw Opening | Throat Depth | Pipe Jaw | Weight |
|-----------|-----------|-------------|--------------|----------------|------------|
| 600674 | 4-1/2" | 4" | 2-5/8" | 1/8" to 2" | 19.40 lbs. |
| 600675 | 5-1/2" | 5" | 3-5/16" | 1/8" to 2-1/2" | 29.20 lbs. |
| 600676 | 6-1/2" | 5-1/2" | 3-13/16" | 1/8" to 2-1/2" | 41.85 lbs. |
| 600656HD | 6" | 6" | 3-1/2" | 1/8" to 3" | 64.10 lbs. |
| 600648HD | 8" | 7-1/2" | 4-1/2" | 1/8" to 3" | 86.20 lbs. |

Michigan Pneumatic Model MP-290-ST Air Caulking Gun

Produces a constant flow for an even bead. Ideal for construction and automotive applications.



| | |
|-------------------------|----------------------|
| Max. Air Pressure | 70 psi |
| Air Inlet Thread | 1/4" |
| Tube Size | 2" dia. x 8-1/2" lg. |

JET Toe & Screw Jacks

Screw Jacks

| Model No. | Rated Capacity | Screw Size | Base Size | Closed Height | Extended Height |
|-----------|----------------|------------------|-----------|---------------|-----------------|
| SJ-5T | 5 ton | 1" x 6" | 4-1/2" | 9" | 13" |
| SJ-10T | 10 ton | 1-1/2" x 8-3/8" | 5-1/4" | 11" | 17-1/2" |
| SJ-15T | 15 ton | 1-5/8" x 10-1/2" | 6" | 13-3/4" | 21" |
| SJ-20T | 20 ton | 2" x 12" | 6-7/8" | 16" | 25" |
| SJ-25T | 25 ton | 2-1/2" x 12" | 8" | 16-1/2" | 25-1/4" |

Turning Bars

| Model No. | Size | Fits Jack |
|-----------|------------|------------------|
| 440301 | 1/2" x 18" | SJ-5T |
| 440302 | 5/8" x 24" | SJ-10T |
| 440303 | 3/4" x 36" | SJ-15T to SJ-25T |
| 440304 | 3/4" x 42" | SJ-15T to SJ-25T |



440304



SJ-5T

Michigan Pneumatic Model APGG1 Air Operated Grease Gun

One handed grease gun delivers 1500 to 9000 psi each time the trigger is pressed. Loads three ways and has E-Z air vent cap. Equipped with 1/4" NPT fitting.



Michigan Pneumatic Model MC-114

High Frequency Vibrator

For Molding/Core Machines and Foundries

Heavy-duty vibrator cast from ductile iron and precision machined to provide a long service life under the most adverse foundry conditions. Ideal for all production and automotive foundries. **Other models available.**



| | |
|--------------------------------|--------------|
| Length | 5-3/4" |
| Height | 3-1/4" |
| Width | 2-3/8" |
| Mounting Bolt Centers | 3-3/4" or 4" |
| Weight | 7 lbs. |
| Vibrations/Min. @ 70 psi | 9100 |
| Air Inlet Thread | 1/4" |

Chicago Pneumatic Model CP-718

Car Shaker/Vibrator

Quickly locates all interior and exterior squeaks and rattles. Includes 28 ft. air supply and extension hose, frequency control regulator and 8 ft. exhaust hose with muffler.



| | |
|--------------------------------|-------------|
| Recommended Air Pressure | 100-145 psi |
| Vibrations Per Minute | 300-1400 |
| Cylinder Weight | 15 lbs. |
| Hose Size | 3/8" |
| Average Air Consumption | 3 cfm |