



Specialty Tools

Call Today to Order • 800-521-8104



4PGG2-AUTO

Air Operated Automatic Grease Gun

One-handed grease gun features a two stage trigger which allows single or multiple stroke dispensing. Flexible and rigid nozzles included.

Grease Reservoir Capacity	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
16 oz	16-1/2"	3.5 lbs	1/4"	3/8"	6.5 cfm



MP-290-ST

Air Operated Caulking Gun

Produces a constant flow for an even bead. Ideal for construction and automotive applications.

Max Air Pressure 65 psi.

Tube Size	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
2" dia. x 8-1/2" long	12-1/2"	2.55 lbs	1/4"	3/8"	0.75 cf per stroke



MP-AS8-ST

Air Operated Paint Spray Gun

High production spray gun designed to handle all lacquers, enamels, and any automotive refinishing materials.

Feed Type	Fluid Nozzle Size	Cup Capacity	Max PSI	Height	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
Suction	5/8"	1 liter	50-70	11-1/2"	5"	2.3 lbs	1/4"	3/8"	8 cfm



4160 Series Linear & Swing Style Lapping Tools

Ergonomic, lightweight and well-balanced design used for deburring or finishing slots, ribs and other intricate parts. Linear stroke is designed for draw-filling narrow areas. Ideal for any mold and die shop's polishing bench.



6mm x 70mm 800 Grit Ceramic Stone included

Model	Stroke	Free Speed	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
MP-4160-L07	0.7"	19,000 spm	7.3"	0.44 lbs	1/4"	3/8"	1.6 cfm
MP-4160-S07	0.7"	18,000 spm	7.3"	0.44 lbs	1/4"	3/8"	1.6 cfm



MP-1000A-ST Reciprocating File

Small, lightweight "Super Hand" performs with the power and efficiency of much larger tools. Ideal for filing, descaling, grinding, chamfering and polishing. Great for curves.

Files also available:

Strokes Per Minute	Stroke	Shank Diameter	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
3700	23/64"	1/4"	7-1/8"	2.2 lbs	1/4"	3/8"	8.5 cfm

- 9A222 Rat Tail File (set of 5)
- 9A223 Triangular Taper File (set of 5)
- 9A224 Half Round File (set of 5)
- 9A225 Flat Bastard File (set of 5)



MP-0815 Reciprocating Gasket Remover

Easy to handle, lightweight and compact. Ideal for removing gaskets, tile, glue, resin, old grease and paint.

Blows Per Minute	Bore	Stroke	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
4500	0.5"	2.25"	9-3/4"	1.5 lbs	1/4"	3/8"	4.5 cfm



MP-AP650-ST Punch/Flange Tool

Two-in-one quarter-paneling tool is ideal for crimping or flanging panels together. Also great for punching clean holes for any operation.

Punch Hole Size	Flange Capacity	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
3/16"	14 Gauge	10"	2.9 lbs	1/4"	3/8"	4 cfm



MP-9361

Scribe Equipped with Stylus Only. Accepts chisels, available separately or in MP-9361K-ST Kit

MP-9361 Engraving Pen

Writes on a variety of materials, such as steel up to RC-64, glass, plastic and wood. Can be used for deburring and trimming, and is excellent for removing broken studs. A must for paleontologists and aircraft parts manufacturers. Includes hose, filter, #7177 stylus and plastic carrying case.



MP-9361K-ST

Scribe Kit

Includes Stylus, three different chisels, chisel adapter and extra air fitting.



Blows Per Minute	Bore	Stroke	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
13,500	0.228"	0.323"	5"	5 oz	1/8"	1/4"	1.1 cfm

Replacement Parts

7177	Stylus
10-100108	Chisel Adapter
10-100110	Blank Chisel
10-100111	Angle Chisel
10-100112	Flat Chisel



MP-GR2510


MP-GR2510A

1/4" Front Exhaust Hand-Held Routers

Ideal for trimming and cutting plastic parts, removing flashing from injection molded parts, wood, aluminum and fiberglass. Lightweight and easily maneuvered in tight areas. Perfect for one-hand operation. Steel and Aluminum "A" models available.

Model	Collet Size	Free Speed	Maximum HP	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption	Housing Material
MP-GR1810	1/4"	18,000 rpm	.9	6-1/4"	3.25 lbs	1/4"	3/8"	12 cfm	Steel
MP-GR1810A-14	1/4"	18,000 rpm	.9	6-1/4"	2.50 lbs	1/4"	3/8"	12 cfm	Aluminum
MP-GR2510	1/4"	25,000 rpm	.9	6-1/4"	3.25 lbs	1/4"	3/8"	12 cfm	Steel
MP-GR2510A	1/4"	25,000 rpm	.9	6-1/4"	2.50 lbs	1/4"	3/8"	12 cfm	Aluminum

Router Guide	Collet Size	Dimensions in Inches			
		A	B	C	D
GR-2531	3/8"	1-1/2"	1/2"	3/8"	1/8"
GR-2402	1/4"	1"	3/8"	3/8"	1/8"
GR-2420	1/4"	1"	5/8"	1/8"	1/8"

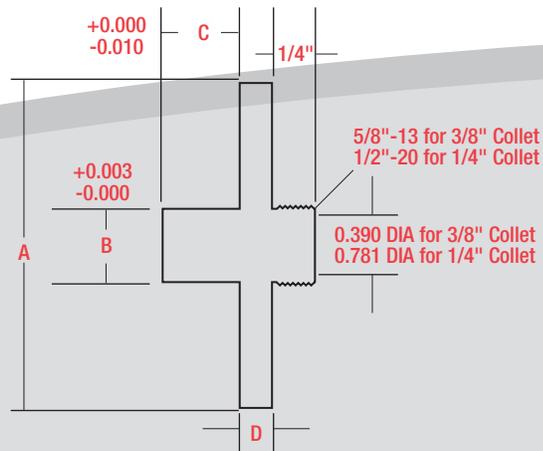



Cleco Roller and Hex Body Installation Tools

Used to install and remove most brands of cylindrical and hex body Clecos quickly and effortlessly with a factory setting to prevent overtightening. It features a lockable reverse button on the top of the tool, a variable speed trigger and quiet operation.



Shown with Cleco fastener (not included)



W931CB Roller Body Installation Tool

Model	Free Speed	Set Torque	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
MP-CIT-2000	2000 rpm	18 in-lbs	10"	2.5 lbs	1/4"	3/8"	7.5 cfm
MP-TF120H-OP	2000 rpm	55 in-lbs	8"	1.85 lbs	1/4"	3/8"	1 cfm



MP-209



MP-309

Cleco Spring Style Installation Tools

Ideal for aircraft production assembly and mechanics. It features a lockable reverse button on the top of the tool, spring type Cleco installation tool quickly installs button type and side grip temporary fasteners. Additional features include a feather trigger and quiet operation.



Shown with Cleco fastener (not included)

Model	Length	Weight	Air Inlet Thread	Rec'd Hose Size
MP-209	5-1/2"	1.25 lbs	1/4"	1/4"
MP-309	5-1/2"	1.25 lbs	1/4"	1/4"



MP-8009RS-B

3/4" Dia. Rivet Shaver Kit

Heavy-duty rivet shaver ideal for precision shaving of rivet heads. Designed so the skirt face is parallel to the cutter face. Spring loaded nosepiece and stabilizer enables operator to feed cutter to the rivet faster and more accurately. Kit includes all seven skirts shown below. Cutters sold separately.

Free Speed	Max HP	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
16,000 rpm	1	7-1/2"	3 lbs	1/4"	3/8"	15 cfm



SP8931 5/16" SP8904 3/8" SP8903 7/16" SP8902 1/2" SP8901 9/16" SP8930 5/8" SP8929 3/4"



MP-5150DP-400B-12SQ

5150 Series

1/2" Square Drive Nutrunners

Compact, powerful pistol grip nutrunner uses precision machined planetary gears to generate high torque for fastening applications. Handle exhaust and muffler meet OSHA requirements.

Model	Chuck Capacity	Free Speed	Stall Torque	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
MP-5150DP-160B-12SQ	1/2"	160 rpm	160 ft-lbs	9-3/4"	5.5 lbs	3/8"	3/8"	6 cfm
MP-5150DP-400B-12SQ	1/2"	400 rpm	44 ft-lbs	8-1/2"	4.6 lbs	3/8"	3/8"	6 cfm



MP-RCD-10

1-1/2" Sq. Railcar Door Opener w/ Stinger

Railcar Door Openers have simplified the otherwise laborious and dangerous process of opening railcar doors with long breaker bars. The RCD is designed for opening the bottom chute doors found beneath the railcars so the car's payload can be unloaded into subterranean storage containers beneath the rails.

Railcar Door Opener equipped with everything you need:

- A special attachment called a stinger custom-fit to railcar door chute receptacles, allowing you to effortlessly open and close the chute doors
- 15-1/2" diameter wheels w/4.80/4.00- 8", flat-free, solid polyurethane tires, knobby tread

The RCD is operated by simply squeezing the lever on the handle. This tool is also equipped with a forward and reverse switch conveniently located on the frame, eliminating the need to bend over to control the direction, further reducing operator fatigue.

Square Drive	Max Torque	Handle Width	Frame Dimensions	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
1-1/2"	4460 ft-lbs	30"	24-1/2" W x 45-1/2" H x 37" D	250 lbs	3/4" FPT	3/4"	38 cfm



HEX-3 Stinger



MP-6902K7-ST

Utility In-Line Driver

Versatile tool used in the automotive industry. Excellent for cleaning welds, and removing adhesives and rust from work surfaces. Kit includes rubber eraser, two fine and two coarse wire brushes and adaptors.

SM-6902	Utility In-Line Driver	0511	11mm Brush (Fine)
SA-6902RW	Rubber Eraser	0711	11mm Brush (Coarse)
SA-6902WH	Adaptor (11mm)	0523	23mm Brush (Fine)
SA-6902RH	Adaptor (23mm)	0723	23mm Brush (Coarse)

Free Speed	Length	Weight	Air Inlet Thread	Rec'd Hose Size	Avg. Air Consumption
3500 rpm	12"	3.2 lbs	1/4"	3/8"	13 cfm

MP-6902K7-ST Accessories (included)

