



## NPK Model NPP-06

### Pulse Tool

### Features Ergonomic Grip and Handle Exhaust

Introducing the NPK "N" series single blow pulse tools. NPK has increased the internal air motor torque by 25%, created a unique by-pass port in the pulse mechanism, and redesigned the relief valve. These improvements will keep the tool on the assembly line longer by reducing the number of oil changes, and decreasing the fluctuations in the output torque which increases the accuracy. NPK has improved the throttle mechanism to reduce the trigger pull.

### Specifications

Square Shank.....	3/8"
Bolt Capacity .....	1/4"
Free Speed .....	6500 rpm
Torque Range .....	16-27 ft.-lbs.
Length .....	5.75"
Weight .....	1.8 lbs.
Air Inlet Thread .....	1/4"



## NPK Model NPP-08

### Pulse Tool

### Features Ergonomic Grip and Handle Exhaust

Introducing the NPK "N" series single blow pulse tools. NPK has increased the internal air motor torque by 25%, created a unique by-pass port in the pulse mechanism, and redesigned the relief valve. These improvements will keep the tool on the assembly line longer by reducing the number of oil changes, and decreasing the fluctuations in the output torque which increases the accuracy. NPK has improved the throttle mechanism to reduce the trigger pull.

### Specifications

Square Shank.....	3/8"
Bolt Capacity .....	5/16"
Free Speed .....	6500 rpm
Torque Range .....	26-37 ft.-lbs.
Length .....	6.00"
Weight .....	1.9 lbs.
Air Inlet Thread .....	1/4"



## NPK Model NPR-05

### Shut-Off Pulse Tool

### Features Ergonomic Grip and Handle Exhaust

Introducing the NPK "N" series single blow, shut-off pulse tools. NPK has increased the internal air motor torque by 25%, created a unique by-pass port in the pulse mechanism, and redesigned the relief valve. These improvements will keep the tool on the assembly line longer by reducing the number of oil changes, and decreasing the fluctuations in the output torque which increases the accuracy. NPK has improved the throttle mechanism to reduce the trigger pull.

### Specifications

Square Shank.....	3/8"
Bolt Capacity .....	3/16"
Free Speed .....	6000 rpm
Torque Range .....	11-16 ft.-lbs.
Length .....	6.5"
Weight .....	2.2 lbs.
Air Inlet Thread .....	1/4"



**MICHIGAN PNEUMATIC TOOL, Inc.**

**NEW  
MODEL**



**Shut-Off**

## **NPK Model NPR-06**

### **Shut-Off Pulse Tool**

### **Features Ergonomic Grip and Handle Exhaust**

Introducing the NPK "N" series single blow, shut-off pulse tools. NPK has increased the internal air motor torque by 25%, created a unique by-pass port in the pulse mechanism, and redesigned the relief valve. These improvements will keep the tool on the assembly line longer by reducing the number of oil changes, and decreasing the fluctuations in the output torque which increases the accuracy. NPK has improved the throttle mechanism to reduce the trigger pull.

### **Specifications**

Square Shank.....	3/8"
Bolt Capacity .....	1/4"
Free Speed .....	6000 rpm
Torque Range .....	15-22 ft.-lbs.
Length .....	6.75"
Weight .....	2.42 lbs.
Air Inlet Thread .....	1/4"



**MICHIGAN PNEUMATIC TOOL, Inc.**



## **NPK Model NPR-07**

### **Shut-Off Pulse Tool**

### **Features Ergonomic Grip and Handle Exhaust**

Introducing the NPK "N" series single blow, shut-off pulse tools. NPK has increased the internal air motor torque by 25%, created a unique by-pass port in the pulse mechanism, and redesigned the relief valve. These improvements will keep the tool on the assembly line longer by reducing the number of oil changes, and decreasing the fluctuations in the output torque which increases the accuracy. NPK has improved the throttle mechanism to reduce the trigger pull.

### **Specifications**

Square Shank.....	3/8"
Bolt Capacity .....	5/16"
Free Speed .....	6000 rpm
Torque Range .....	21-30 ft.-lbs.
Length .....	6.75"
Weight .....	2.42 lbs.
Air Inlet Thread .....	1/4"



**MICHIGAN PNEUMATIC TOOL, Inc.**



## **NPK Model NW-1200B Impact Wrench**

**Features Ergonomic Grip and Handle Exhaust**

### **Specifications**

Shank Size .....	1/2"
Free Speed .....	7000 rpm
Torque Range .....	68-95 ft.-lbs.
Length .....	6-27/32"
Weight .....	4.00 lbs.
Air Inlet Thread .....	1/4"
Average Air Consumption:	3.50 cfm



**MICHIGAN PNEUMATIC TOOL, Inc.**



## **NPK Model NW-1600HA Impact Wrench**


**Features Ergonomic Grip and Handle Exhaust**

### **Specifications**

Shank Size .....	1/2"
Free Speed .....	5000 rpm
Torque Range .....	120-200 ft.-lbs.
Length .....	7-11/16"
Weight .....	5.50 lbs.
Air Inlet Thread .....	1/4"
Average Air Consumption:	5.30 cfm



**MICHIGAN PNEUMATIC TOOL, Inc.**

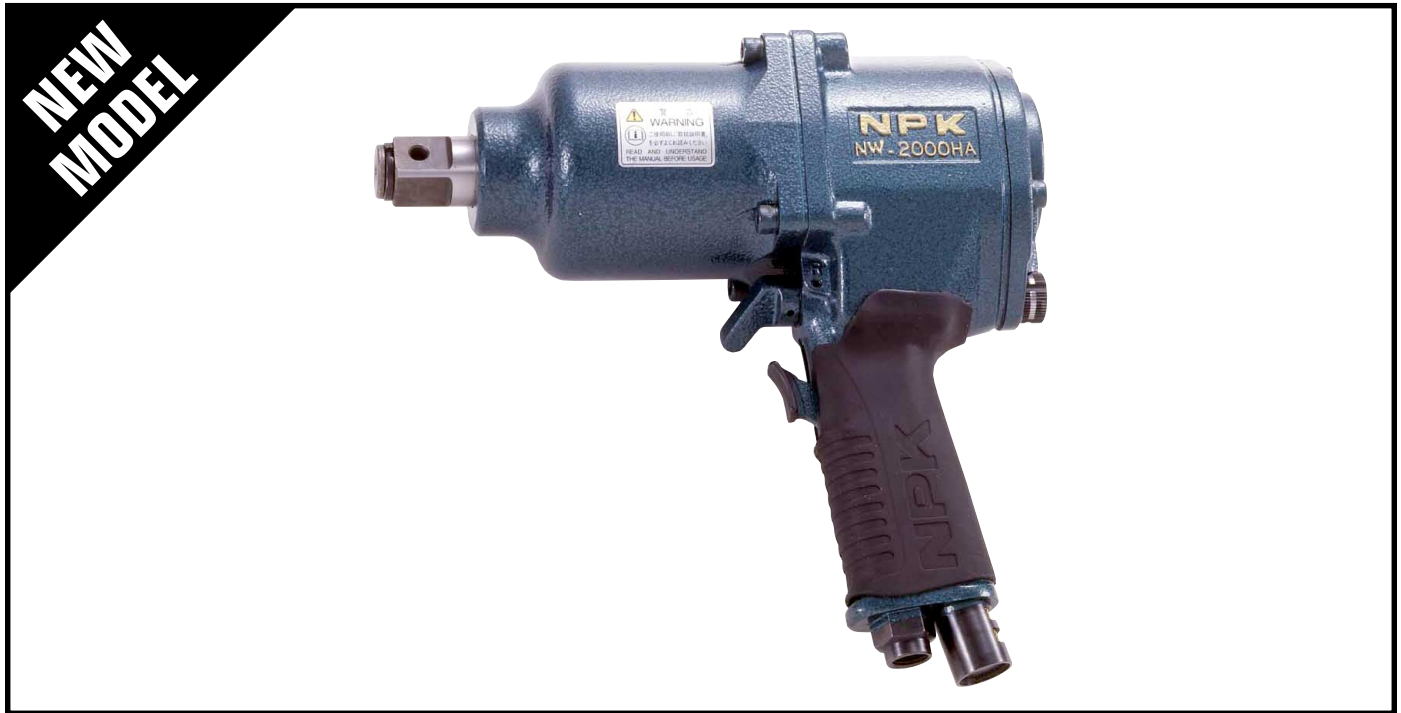

## **NPK Model NW-2000HA Impact Wrench**

**Features Ergonomic Grip and Handle Exhaust**

### **Specifications**

Shank Size .....	3/4"
Free Speed .....	4500 rpm
Torque Range .....	240-375 ft.-lbs.
Length .....	9"
Weight .....	8.40 lbs.
Air Inlet Thread .....	1/4"
Average Air Consumption:	7.10 cfm